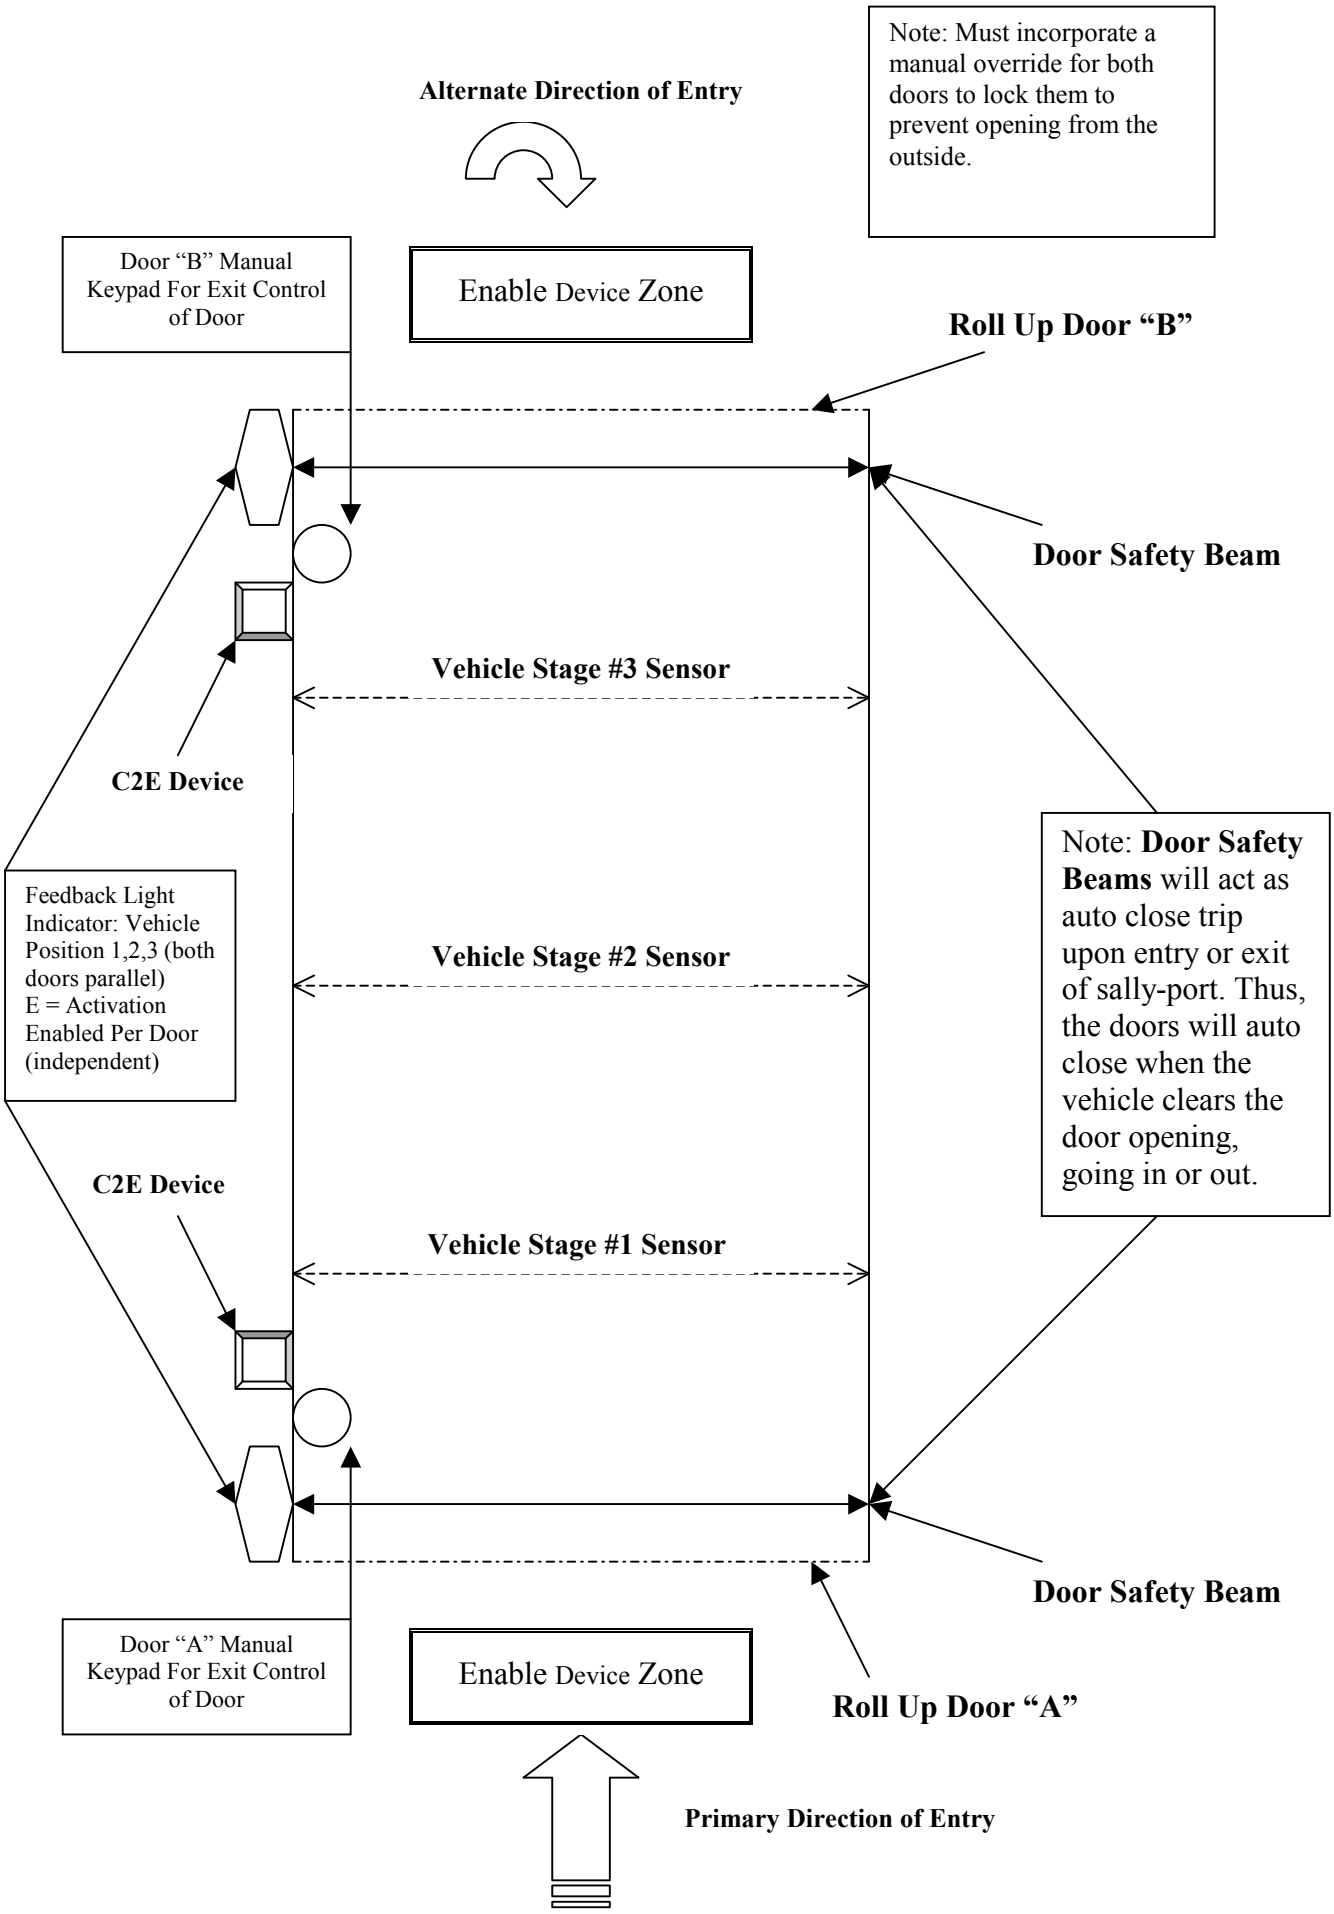
Note: Must incorporate a manual override for both doors to lock them to prevent opening from the outside.
Alternate Direction of Entry
Door "B" Manual Keypad For Exit Control of Door
Enable Device Zone
Roll Up Door "B"
Door Safety Beam
Vehicle Stage #3 Sensor
C2E Device
Feedback Light Indicator: Vehicle Position 1,2,3 (both doors parallel) E = Activation Enabled Per Door (independent)
Vehicle Stage #2 Sensor
Note: Door Safety Beams will act as auto close trip upon entry or exit of sally-port. Thus, the doors will auto close when the vehicle clears the door opening, going in or out.
C2E Device
Vehicle Stage #1 Sensor
Door Safety Beam
Door "A" Manual Keypad For Exit Control of Door
Enable Device Zone
Roll Up Door "A"
Primary Direction of Entry